

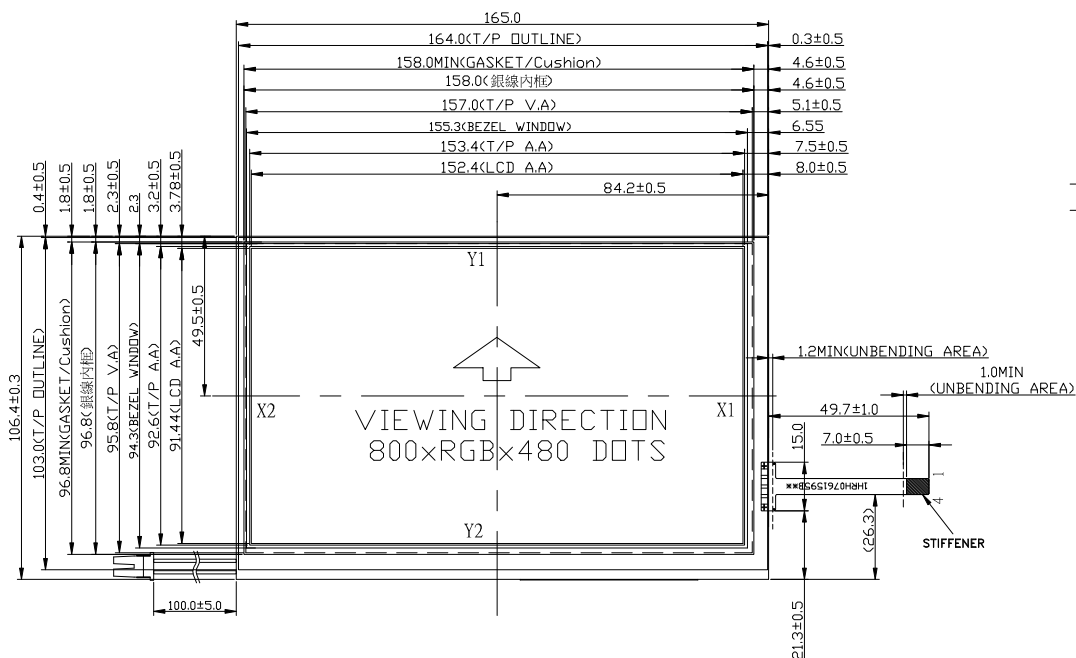


CONFIDENTIAL(B)

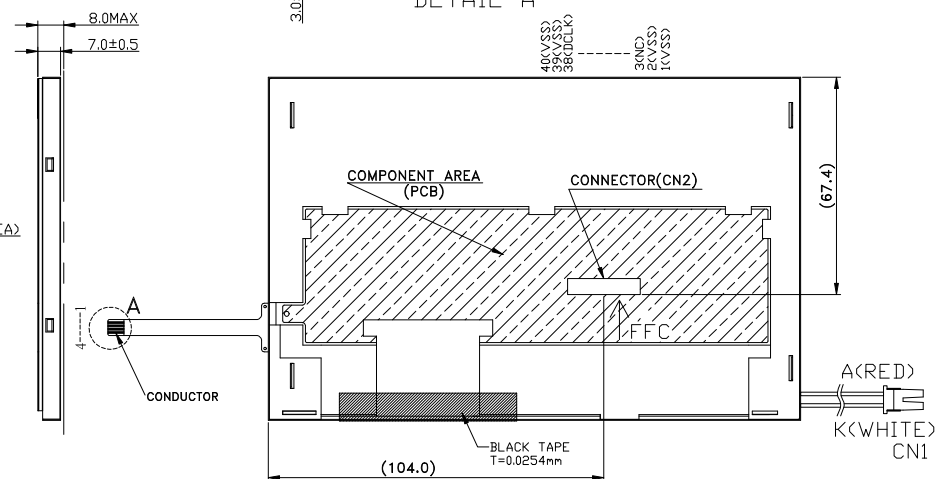

NOTE :

1. LCD : TFT TRANSMISSIVE TYPE , NORMAL WHITE MICRO REFLECTIVE FILM
2. VIEWING DIRECTION : 6 O'CLOCK<GARYSCALE INVERSION>
3. Top : -20~70°C , Tst : -30~80°C
4. LED COLOR : WHITE , 27 PCS DICE
CONSTANT CURRENT : 210mA ; Vled=9.9V<TYP>
5. GENERAL TOLERANCE:±0.3
6. CN1:BHSR-02VS-1<JST> OR EQUIVALENT
7. CN2:IMSA-9681S-40Y901<IRISD> OR EQUIVALENT
8. THE MINIMUM BENDABLE RADIUS<INNER> OF THE FPC IS 0.5mm



REV	DATE	MODEL:UMSH-8596MD-17T(REVTD)
0	Nov.27.15	TITLE: OUTLINE DRAWING
1		DESIGN: Y.D. Shie
2		CHECK: Y.L. Chen
3		APPROVAL: CKT Chen