



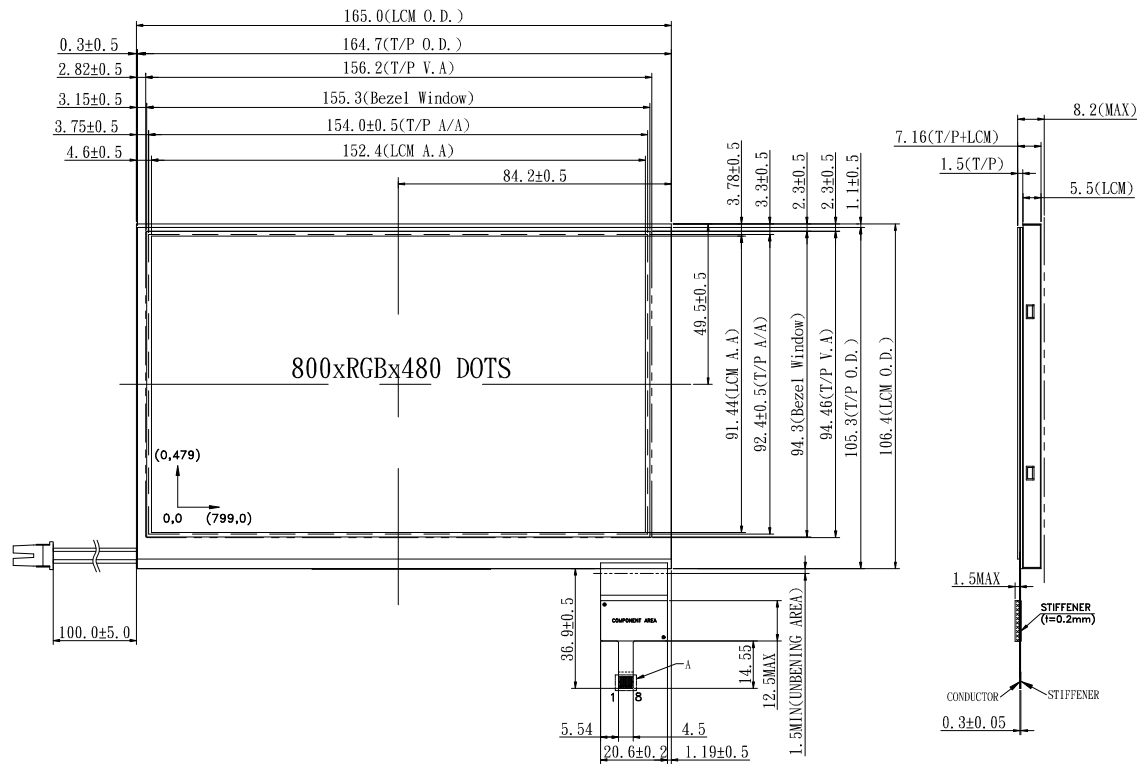


NOTE :

1. LCD : TFT TRANSMISSIVE TYPE , NORMAL BLACK
2. VIEWING DIRECTION : FULL
3. Top : -20~70℃ , Tst : -30~80℃
4. LED COLOR : WHITE , 27 PCS DICE
CONSTANT CURRENT : 210mA ; Vled=9.9V(TYP)
5. GENERAL TOLERANCE:±0.3
6. CN1:BHSR-02VS-1(JST) OR EQUIVALENT
7. CN2:04-6299-640-020-846+(KYOCERA) OR EQUIVALENT
8. PROJECTIVE CAPACITIVE TYPE TOUCH PANNEL
9. THE MINIMUM BENDABLE RADIUS(INNER) OF THE FPC IS 1.0 mm
10. T/P INTERFACE: I2C; IC : ST1633i ; FIVE POINT TOUCH
11. COMPONENT AREA CAN NOT BENDING.



CONFIDENTIAL(B)

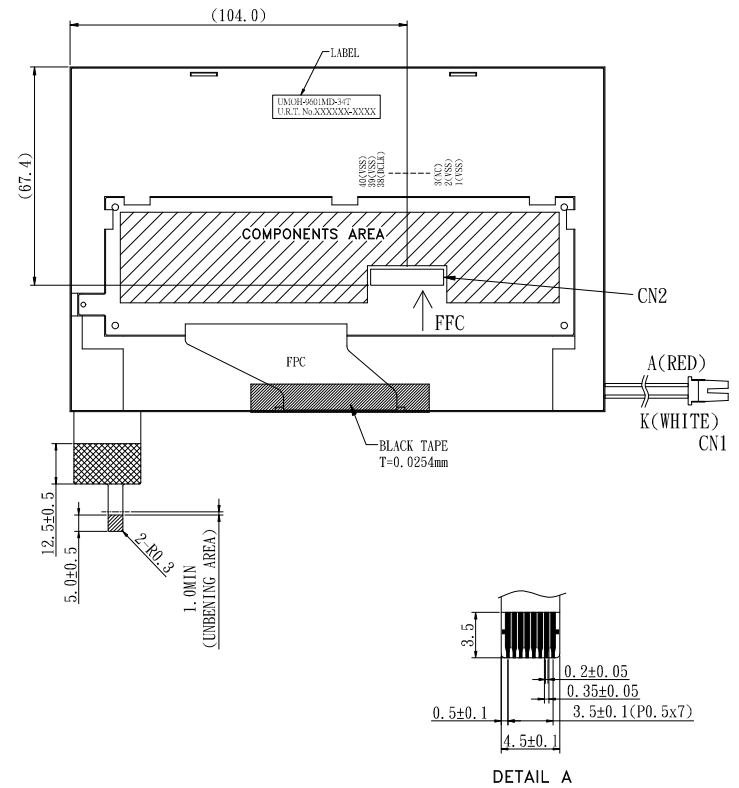

Touch panel	
PIN No.	PIN Name
1	VDD
2	GND
3	GND
4	RST
5	INT
6	SCL
7	GND
8	SDA

REV	DATE	MODEL:UMOH-9601MD-34T
0	May.17.22'	TITLE: OUTLINE DRAWING
1		DESIGN: H.F. Kuo
2		CHECK: Emir Lu
3		APPROVAL: CKT Chen