

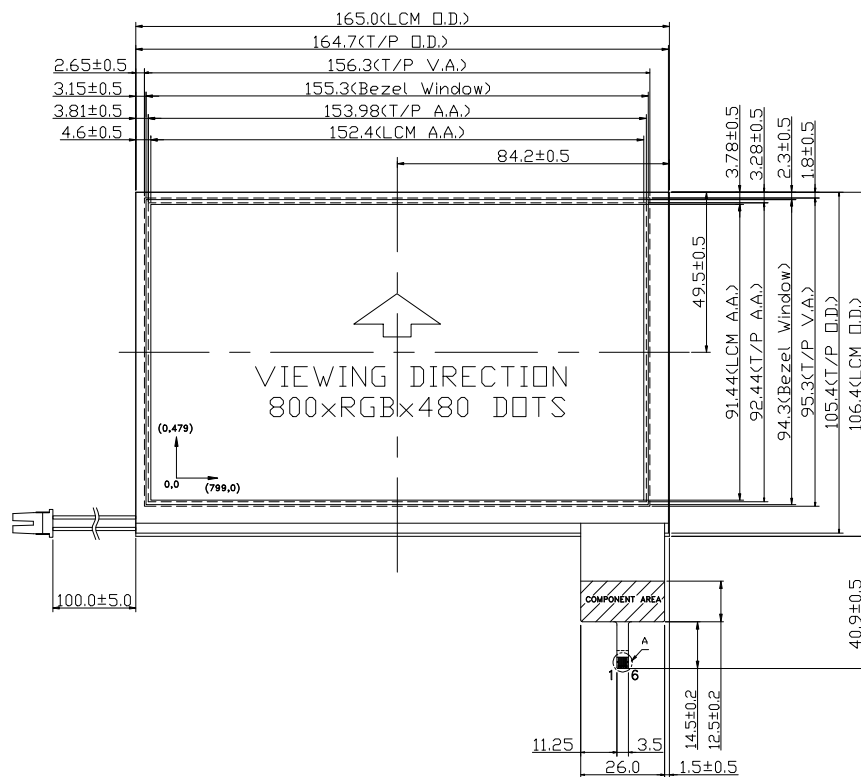




NOTE :



1. LCD : TFT TRANSMISSIVE TYPE , NORMAL WHITE
2. VIEWING DIRECTION : 6 O'CLOCK (GARYSCALE INVERSION)
3. Top : -20~70°C , Tst : -30~80°C
4. LED COLOR : WHITE , 21 PCS DICE
CONSTANT CURRENT : 140mA ; Vled=9.9V (TYP)
5. GENERAL TOLERANCE: ±0.3
6. CN1: BHSR-02VS-1 (JST) OR EQUIVALENT
7. CN2: UJU-JS100-L30-C15 OR EQUIVALENT
8. THE MINIMUM BENDABLE RADIUS (INNER) OF THE FPC IS 1.0 mm
9. MULTI-TOUCH: 10 POINTS , T/P IC: ILI2117A

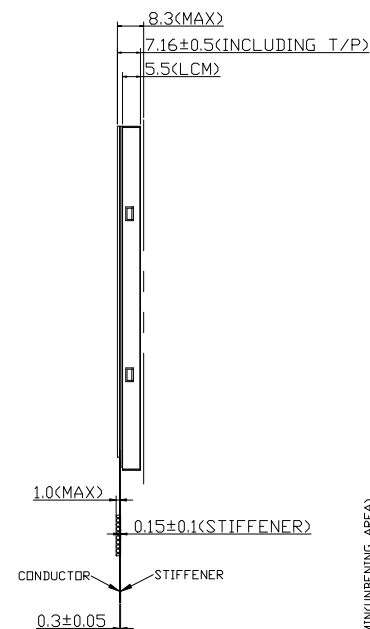

T/P Interface

PIN No.	PIN Name
1	VDD
2	SCL
3	SDA
4	INT
5	Reset
6	GND

CONFIDENTIAL(B)

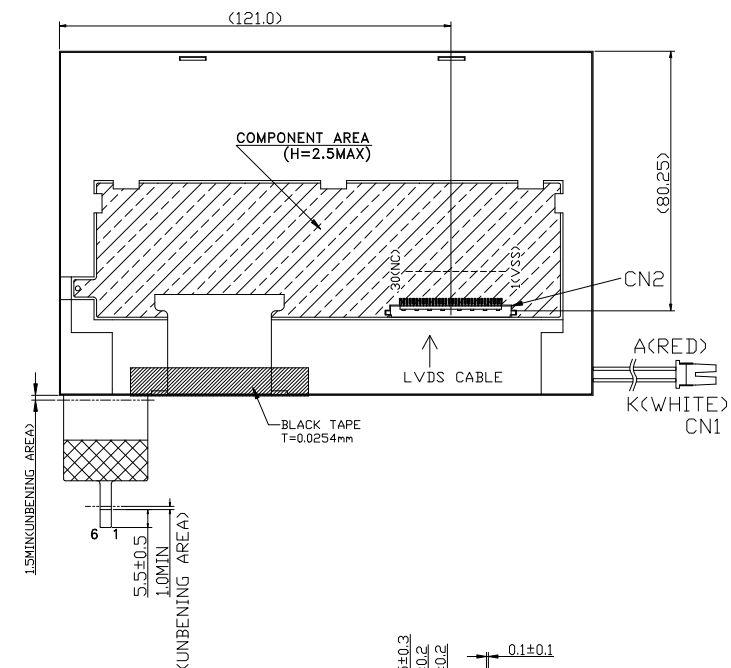

REV	DATE	MODEL: UMSH-8596MD-31T (REV1D)
0	Oct.20.17'	TITLE: OUTLINE DRAWING
1		DESIGN: H.F. Kuo
2		CHECK: Titan Lo
3		APPROVAL: CKT Chen