
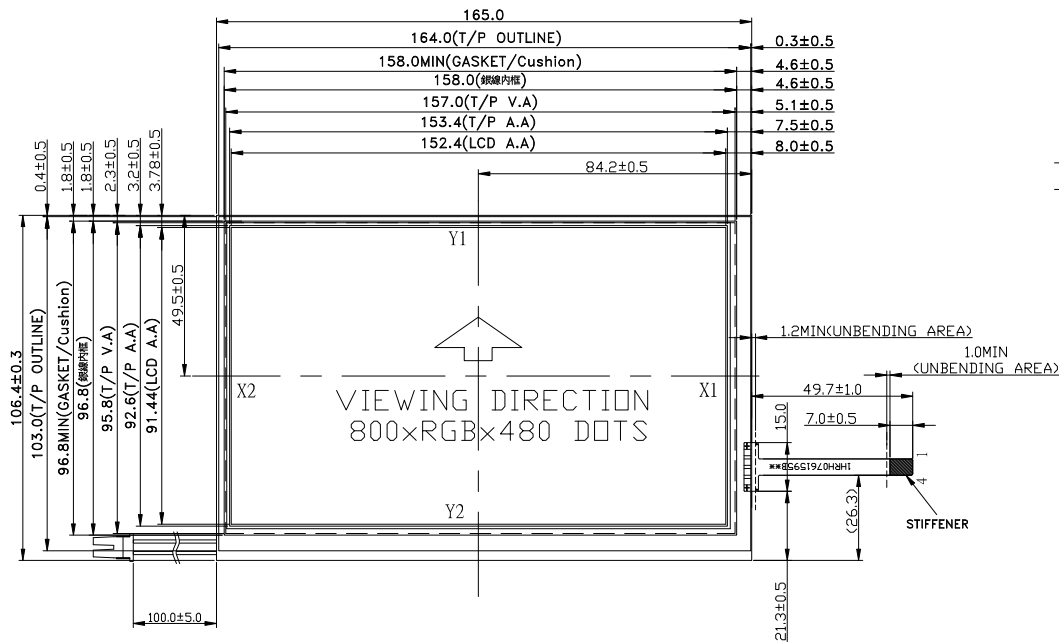



CONFIDENTIAL(B)

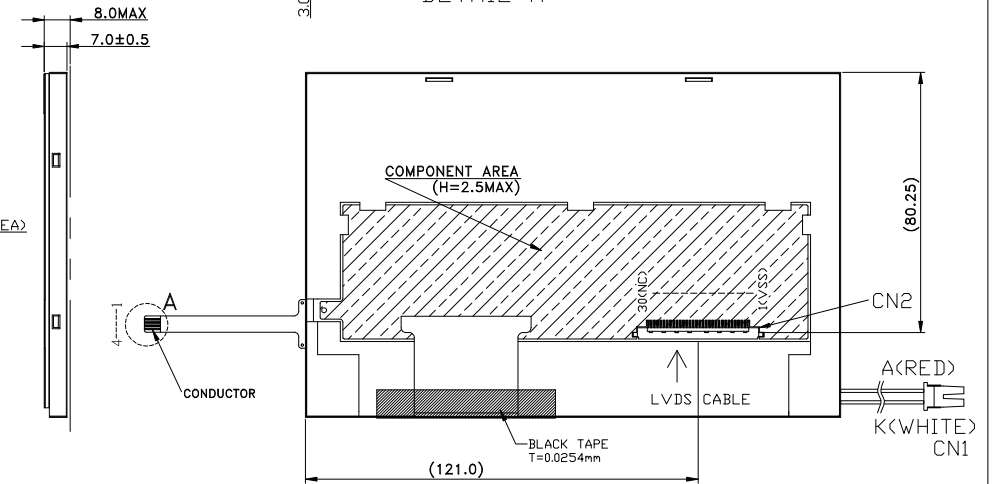

NOTE :

1. LCD : TFT TRANSMISSIVE TYPE , NORMAL WHITE
2. VIEWING DIRECTION : 6 O'CLOCK(GARYSCALE INVERSION)
3. Top : -20~70°C , Tst : -30~80°C
4. LED COLOR : WHITE , 27 PCS DICE
CONSTANT CURRENT : 210mA ; Vled=9.9V(TYP)
5. LCM MODULE BRIGHTNESS : 400 cd/m² (TYP)
6. GENERAL TOLERANCE:±0.3
7. CN1:BHSR-02VS-1(JST) OR EQUIVALENT
8. CN2:UUJ-JS100-L30-C15 OR EQUIVALENT
9. THE MINIMUM BENDABLE RADIUS(INNER) OF THE FPC IS 0.5mm

REV	DATE	MODEL:UMSH-8596MD-16T(REVTD)
0	Stp.04.19'	TITLE: OUTLINE DRAWING
1		DESIGN: Y.D. Shie
2		CHECK: Y.L. Chen
3		APPROVAL: CKT Chen