



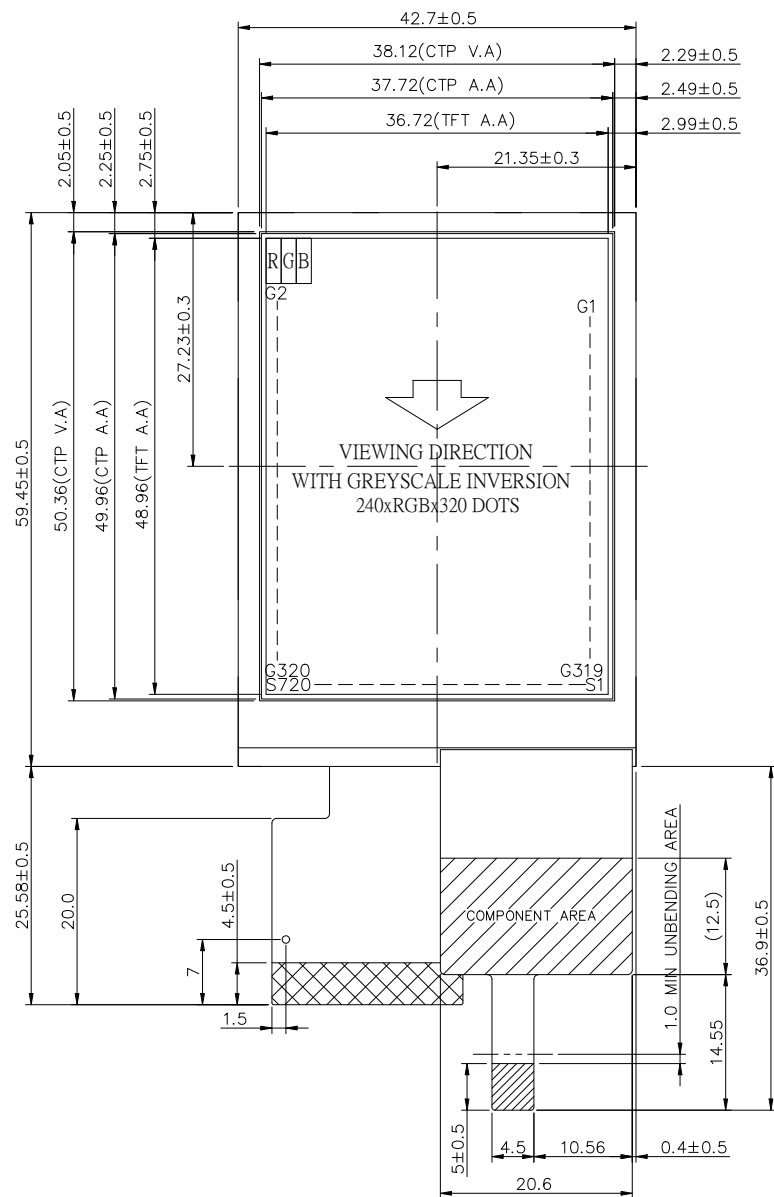


NOTE:

1. LCD: TFT, TRANSMISSIVE MODE , NORMAL WHITE
2. VIEWING DIRECTION: 12 O'CLOCK (WITH GREYSCALE INVERSION)
3. TOP: -20°C-70°C ; TST: -30°C-80°C
4. LED COLOR: WHITE , 4 PCS; IF=80.0mA, VLED=3.3 V(TYP)(Parallel Type , Constant Current)
5. TFT IC: ST7789V2 ; CTP IC: ILI2117A
6. TOLERANCE FOR NOT ASSIGNED : ±0.2 mm
7. TFT PIXEL SIZE : 0.153 x 0.153 mm
8. THE MINIMUM BENDABLE RADIUS(INNER) OF THE FPC IS 0.5 mm
9. IF THE CUSTOMER BEND THE FPC INSIDE OF THE UNBENDING AREA, URT WON'T BE RESPONSIBLE FOR ANY DAMAGE

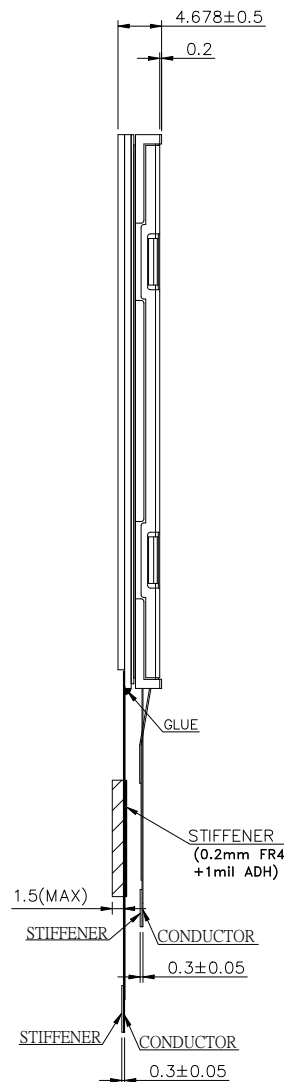

CONFIDENTIAL(B)



DETAIL A