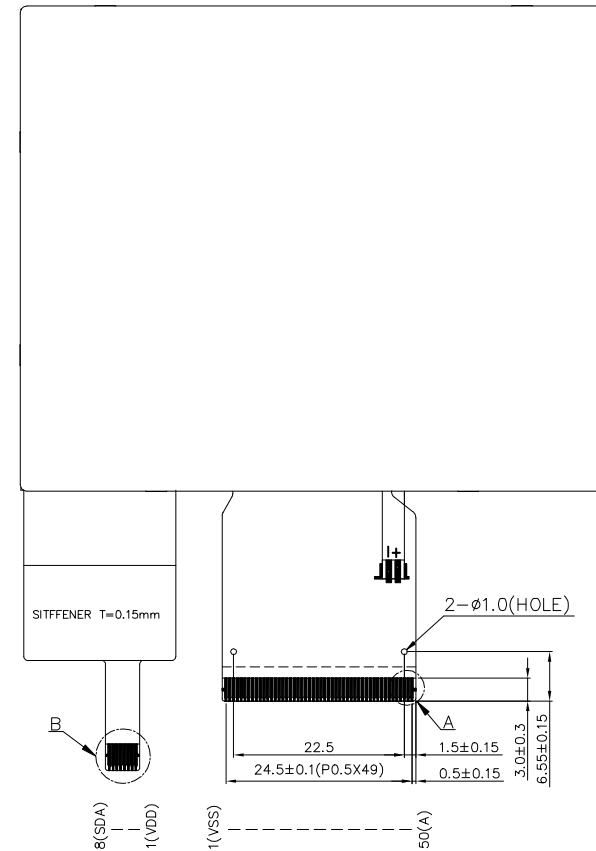


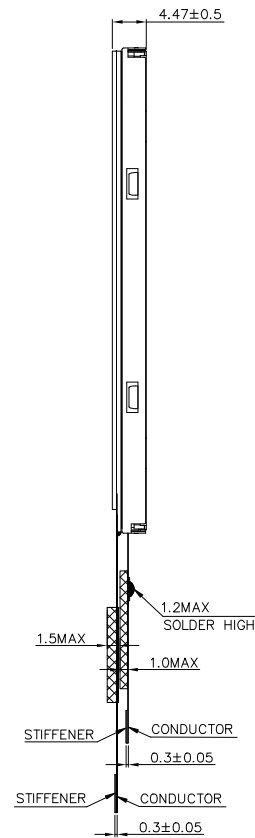
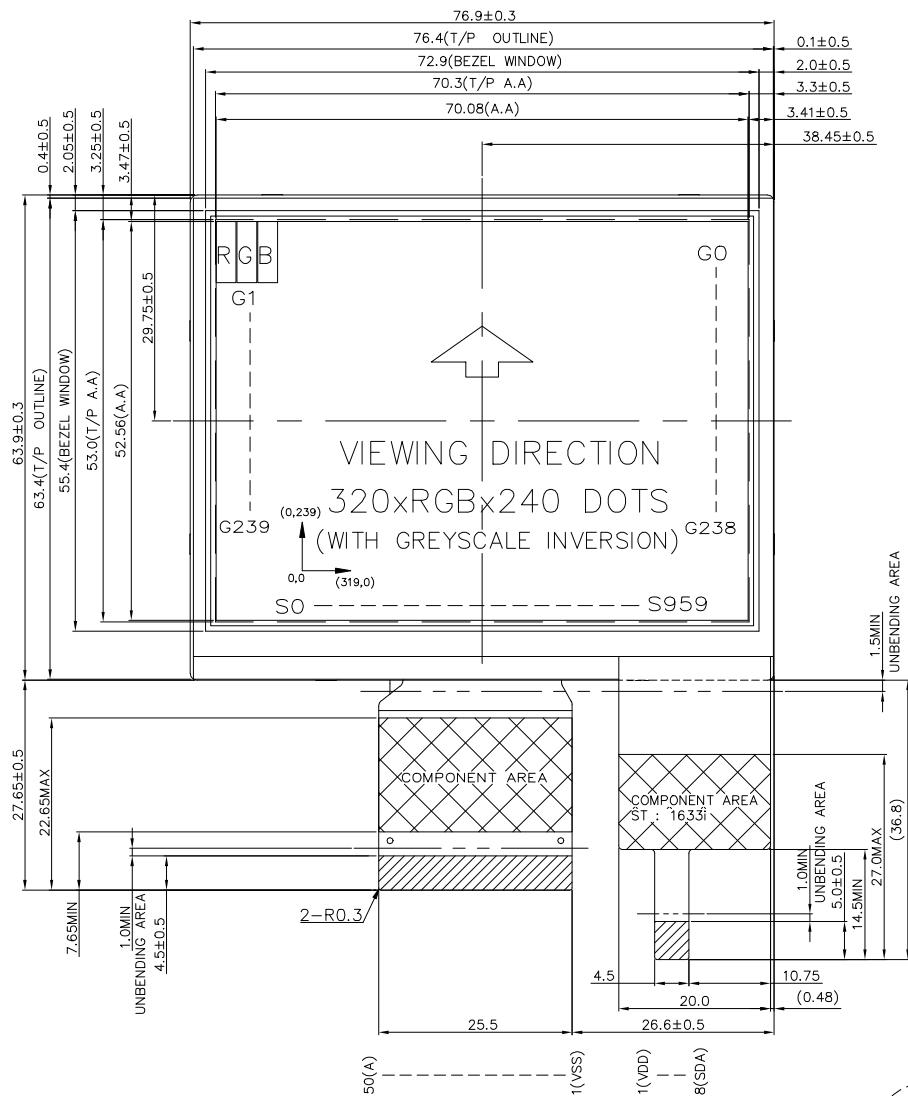


NOTE :

1. LCD:TFT TRANSMISSIVE MODE,NORMAL WHITE
2. VIEWING DIRECTION : 6 O'CLOCK
3. Top : -20~70°C , Tst : -30~80°C
4. TOLERANCE FOR NOT ASSIGNED : ±0.2mm
5. LED COLOR : WHITE , 10PCS DICE CONSTANT CURRENT IF=40.0mA ; VLED=17.0V(Typ)
6. THE MINIMUM BENDING RADIUS (INNER) OF THE FPC IS 1.0 mm.
7. COMPONENT AREA AND SOLDER AREA CAN NOT BE BENDING

REV	DATE	MODEL: UMSH-8065MD-29T
0	Apr.18.16'	TITLE: OUTLINE DRAWING
1		DESIGN: William Don
2		CHECK: Eric Wang
3		APPROVAL: C.K.T.Chen