

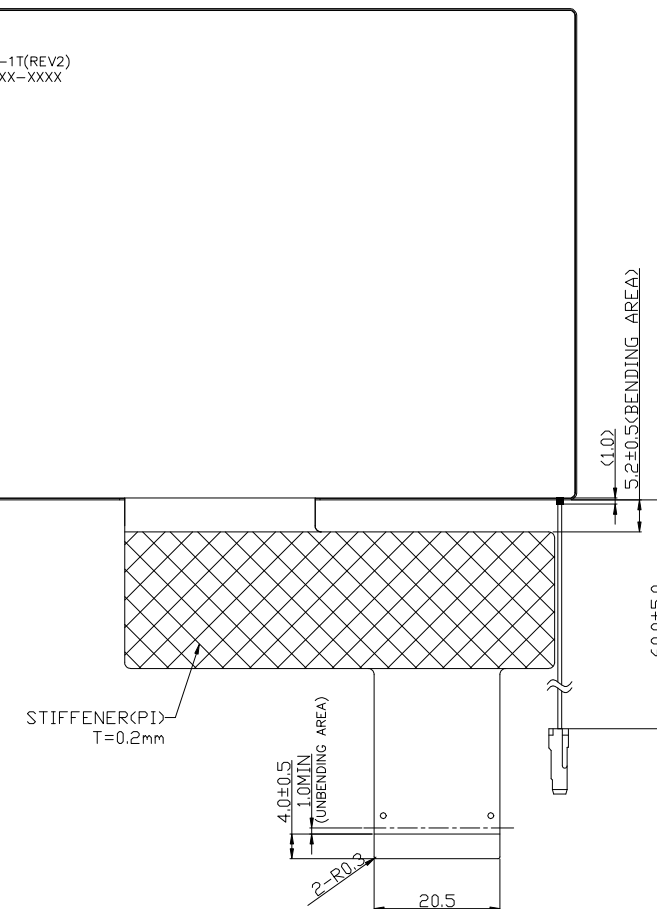
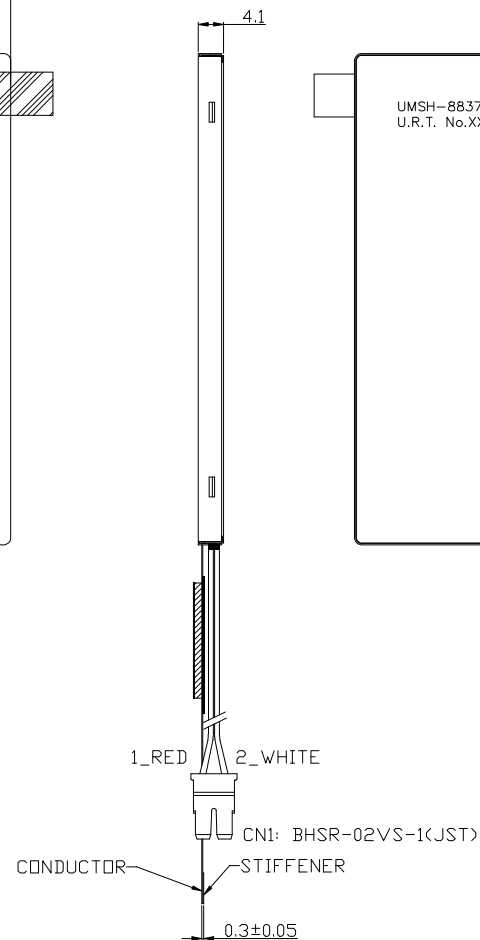
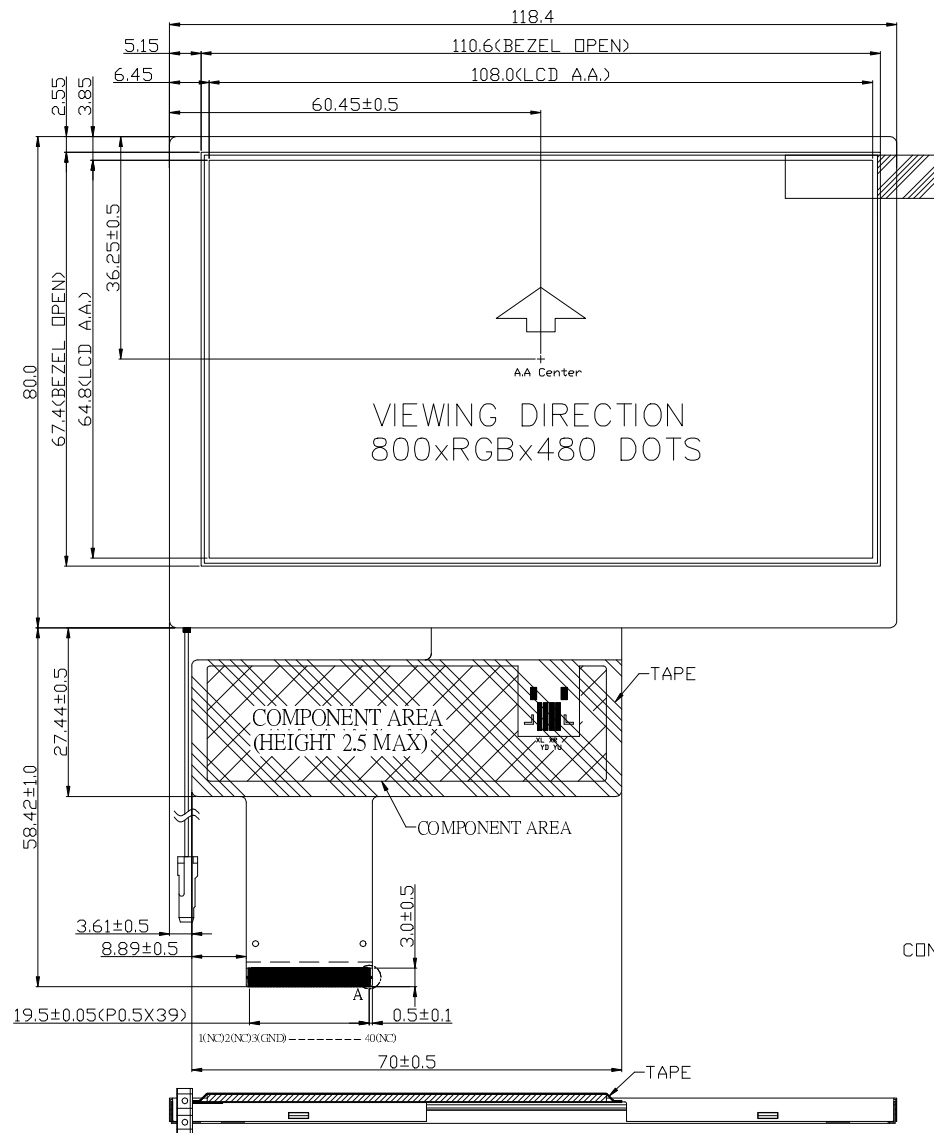




NOTE:

1. LCD : TFT TRANSMISSIVE TYPE , NORMAL WHITE
2. VIEWING DIRECTION : 6 O'CLOCK (GRAY INVERSION)
3. Top : -20~70°C , Tst : -30~80°C
4. LED COLOR : WHITE , LED*10pcs
5. CONSTANT CURRENT IF=120.0mA , VLED : 15.0V(TYP)
6. RoHS-COMPLIANT
7. TOLERANCE FOR NOT ASSIGNED : ±0.3mm
8. THE BENDING RADIUS OF FPC SHOULD BE LARGE THAN 0.6R
9. LUMINANCE : 500.0 cd/m² (MIN) , 700.0 cd/m² (TYP)
10. UNIFORMITY : 70% (MIN)
11. FPC MATCH CONNECTOR : HIROSE FH19SC-40S-0.5SH OR EQUIVALENT
12. BACKLIGHT MATCH CONNECTOR : SM02B-BHSS-1-TB OR EQUIVALENT



REV	DATE	MODEL: UMSH-8837MD-1T(REV2)
0	Feb.07.20'	TITLE: OUTLINE DRAWING
1		DESIGN: William Don
2		CHECK: George Pan
3		APPROVAL: C.K.T. Chen