
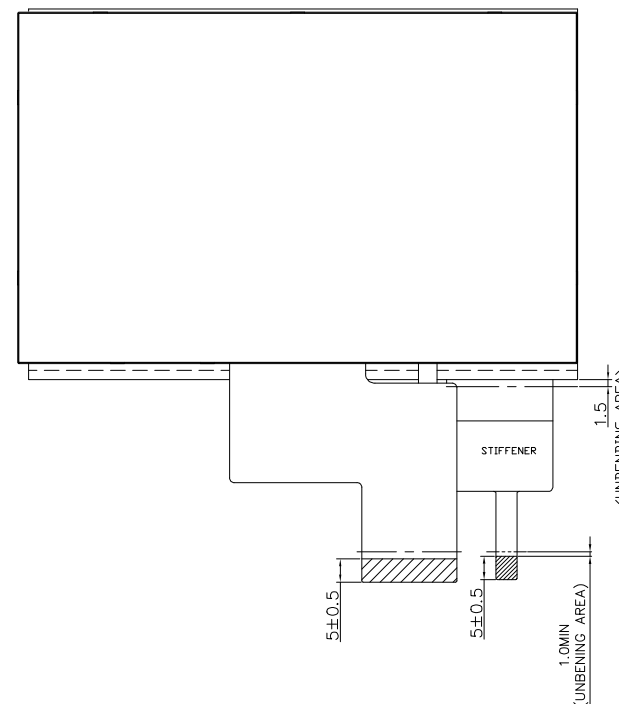



PIN	SYMBOL
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	(NC)
38	(NC)
39	(NC)
40	(NC)

PIN No.	PIN Name
1	TP_VDD
2	GND
3	GND
4	RST
5	INT
6	SCL
7	GND
8	SDA

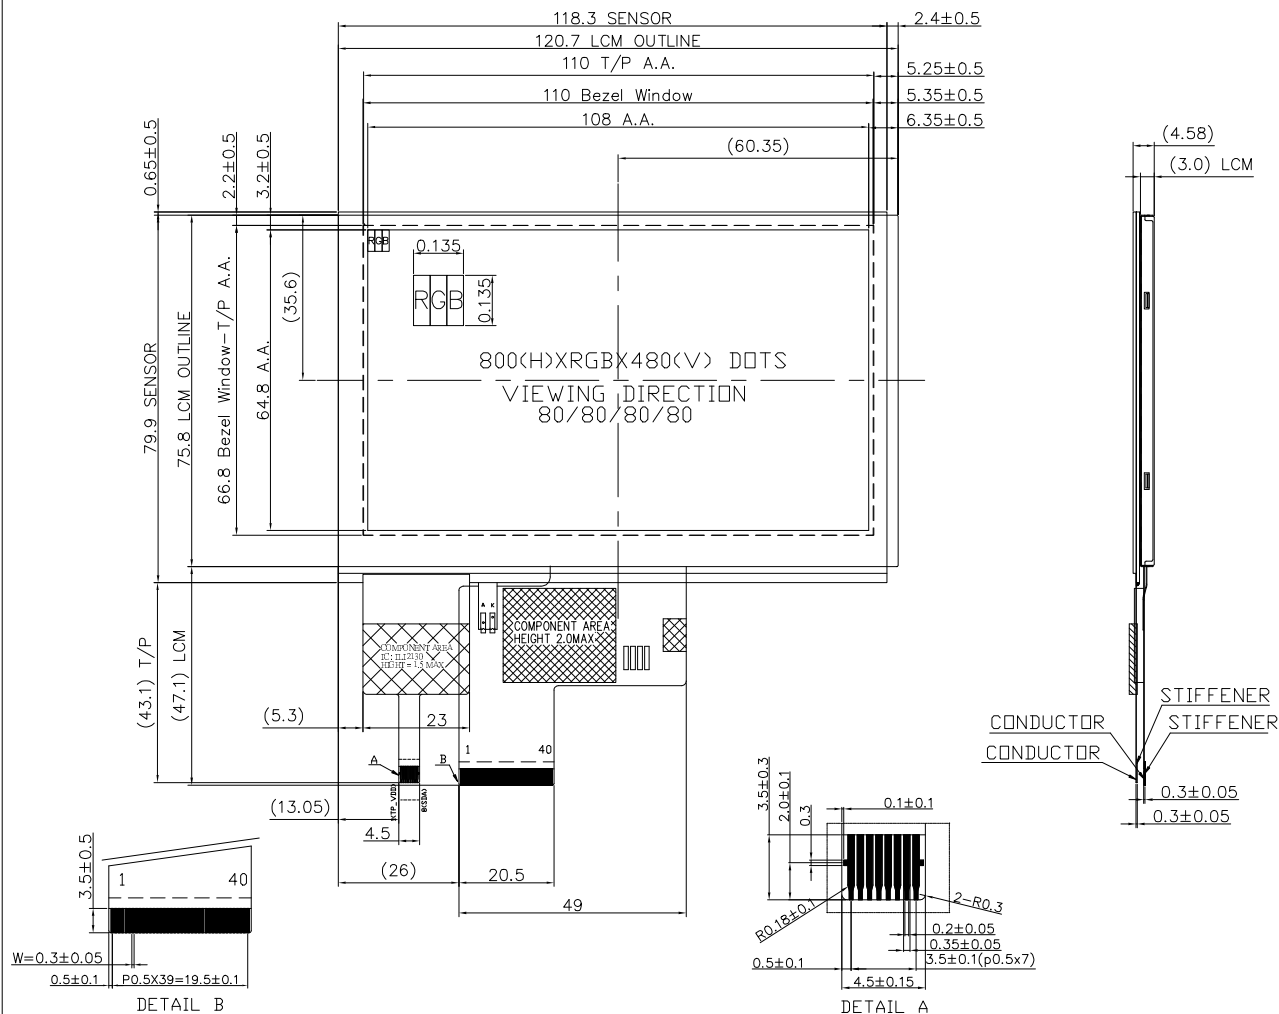

NOTE:

1. DISPLAY TYPE : 5" TFT IPS/NORMAL BLACK
2. VIEWING DIRECTION : ALL
3. Top : -20~70°C, Tst : -30~80°C
4. LED COLOR : WHITE, LEDX12 pcs
5. CONSTANT CURRENT IF=40mA, VLED : 19.0V(TYP)
6. RoHS-COMPLIANT
7. TOLERANCE FOR NOT ASSIGNED : ±0.3mm
8. THE BENDING RADIUS OF FPC SHOULD BE LARGE THAN 1.0R
9. COMPONENT AREA AND SOLDER AREA CAN NOT BE BENDING
10. LCD DRIVER : ST7262
11. TOUCH IC : ILI2130

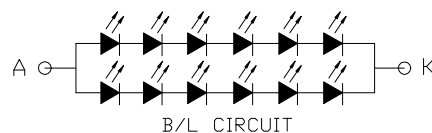

REV	DATE	MODEL: UMOH-9379MD-2T(REV1)
0	Apr.23.21'	TITLE: OUTLINE DRAWING
1		DESIGN: William Don
2		CHECK: George Pan
3		APPROVAL: C.K.T.Chen