

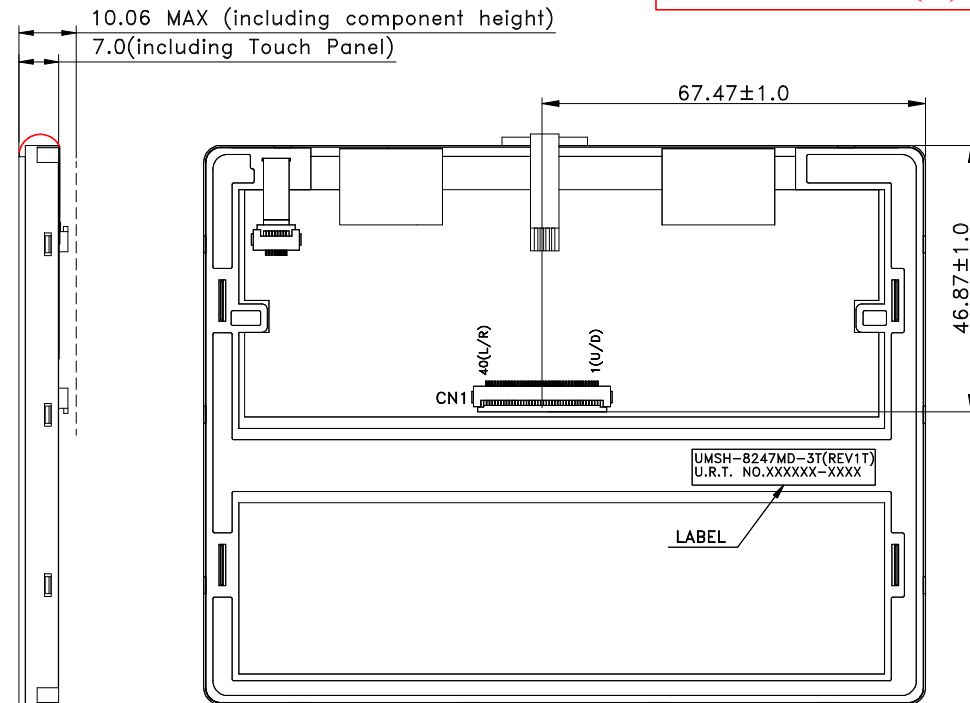


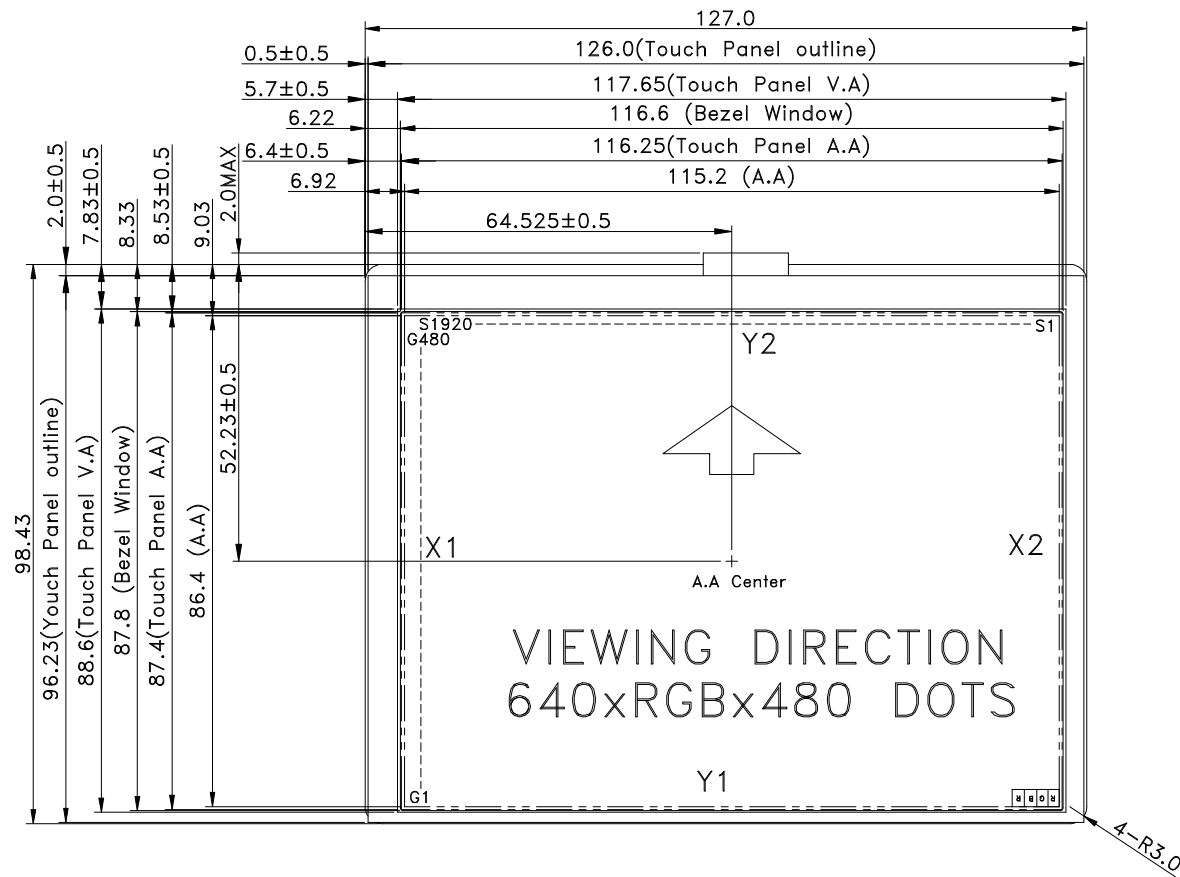

NOTE :

1. LCD : TFT TRANSMISSIVE TYPE , NORMAL WHITE
2. VIEWING DIRECTION : 6 O'CLOCK
3. Top : -20~70°C , Tst : -30~80°C
4. LED BACKLIGHT COLOR : WHITE
5. CONSTANT VOLTAGE FOR LED DRIVER : VLED=5.0 V, ILED=380.0mA(TYP.)
6. TOLERANCE FOR NOT ASSIGNED : ±0.3mm
7. RoHS-COMPLIANT
8. CN1 : 6705-E40N-00R(E&T)
9. CUSTOMER BEZEL WINDOW MUST BE SMALLER THAN TOUCH PANEL
A.A(116.25 mm X 87.4 mm)
10. CUSTOMER CUSHION WINDOW MUST BE LARGER THAN TOUCH PANEL
V.A(117.65 mm X 88.6 mm)0.5 mm
11. "URT" URT REQUEST PROPERTY



PIXEL SIZE