




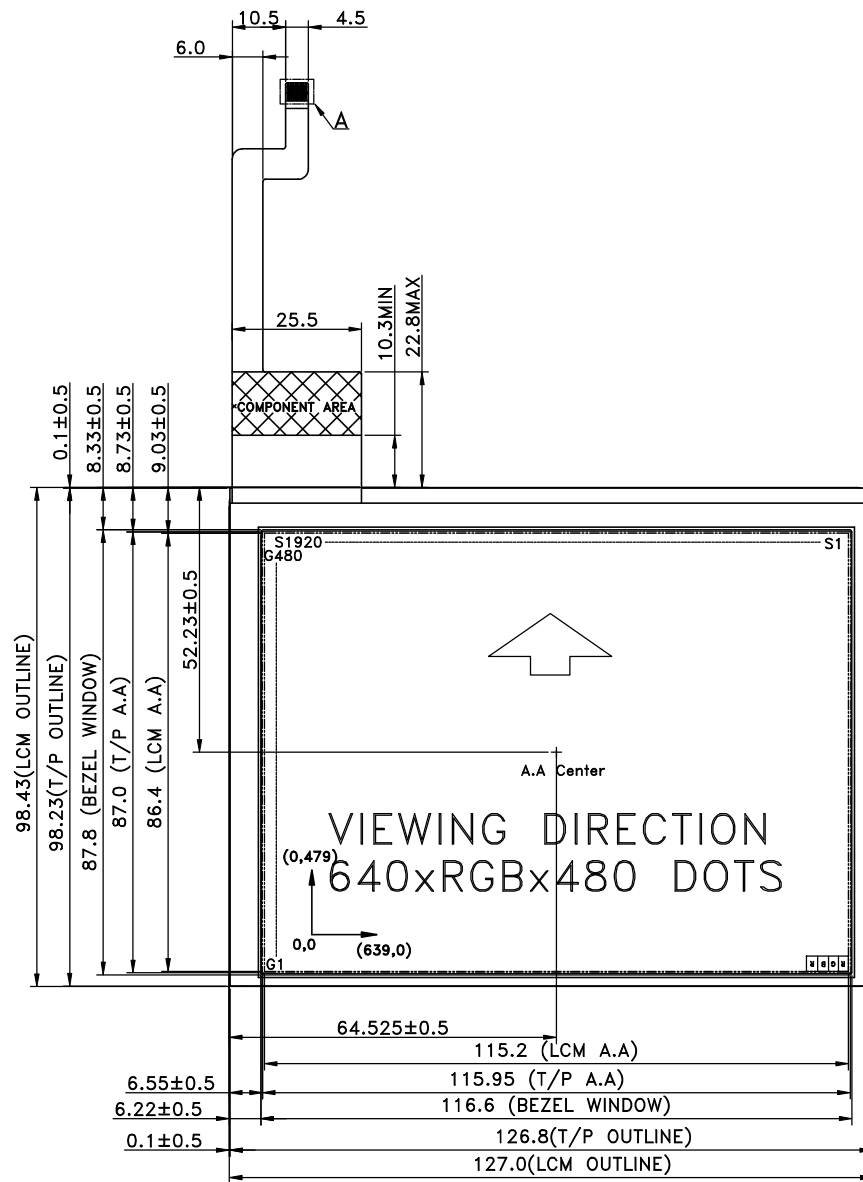


NOTE :


1. LCD : TFT TRANSMISSIVE TYPE , NORMAL WHITE
2. VIEWING DIRECTION : 6 O'CLOCK (GRAYSCALE INVERSION)
3. Top : -20~70°C , Tst : -30~80°C
4. LED BACKLIGHT COLOR : WHITE
5. CONSTANT VOLTAGE FOR LED DRIVER : VLED=5.0 V, ILED=380.0mA (TYP.)
6. TOLERANCE FOR NOT ASSIGNED : ±0.3mm
7. RoHS-COMPLIANT
8. CN1 : 6705-E40N-00R(E&T) OR COMPATIBLE CONNECTORS
9. T/P INTERFACE: I2C ; IC : ILI2117A ; TWO POINT TOUCH
10. COMPONENT AREA CAN NOT BENDING.

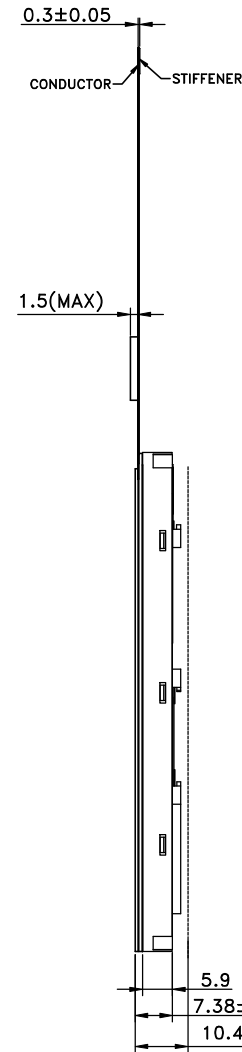

CONFIDENTIAL(B)

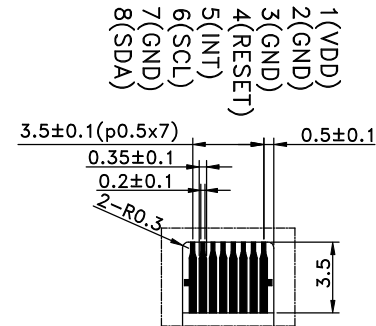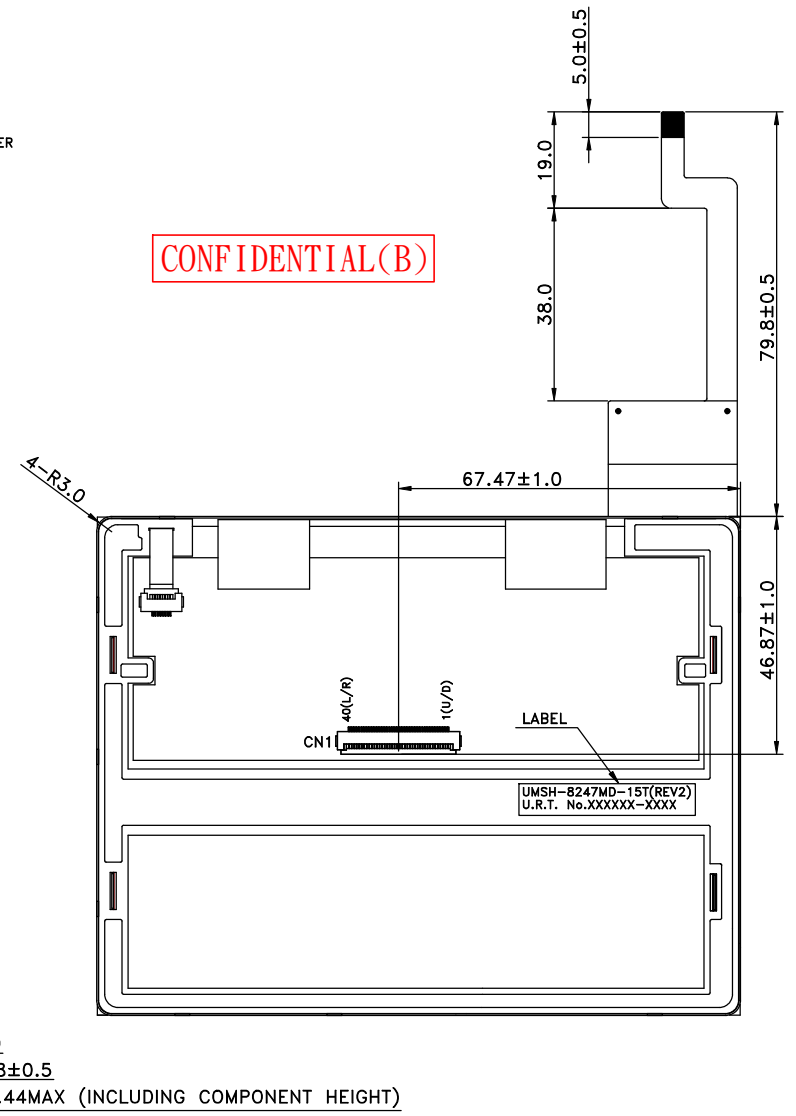

DETAIL A



PIXEL SIZE