CONFIDENTIAL(B)

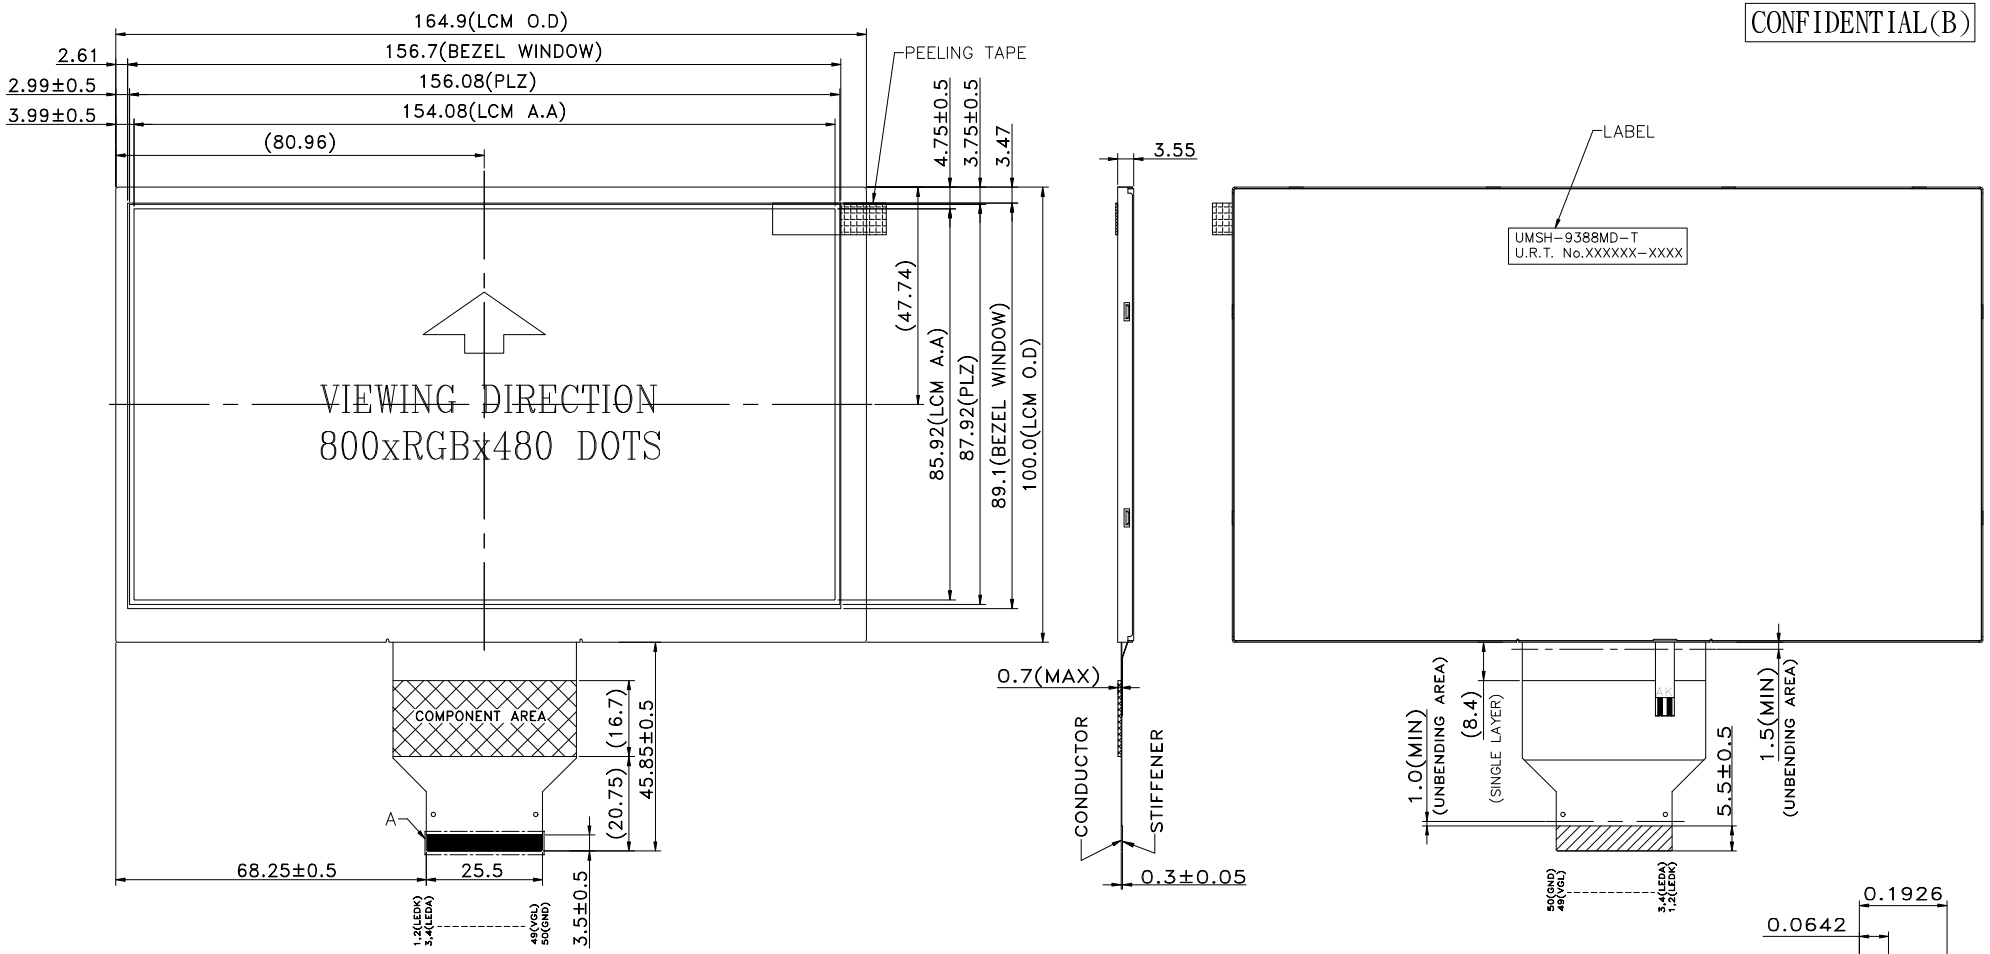



PIXEL DETAIL

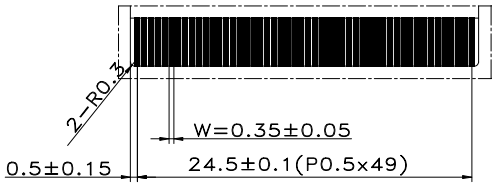

DETAIL A

NOTE:

1. LCD: TFT, TRANSMISSIVE, NORMALLY WHITE
2. Top: −20°C~70°C, Tst:−30°C~80°C
3. VIEWING DIRECTION: 6 O'CLOCK (GRAYSCALE INVERSION)
4. B/L:CONSTANT CURRENT IF=120mA, VF=9.0V(TYP)
5. LCM BRIGHTNESS : 250cd/m² (TYP)
6. TOLERANCE FOR NOT ASSINGNED ±0.3 mm
7. THIS PRODUCT CONFORM WITH THE STANDARD OF ROHS
8. THE MINIMUM BENDABLE RADIUS(INNER) OF THE FPC IS 0.5mm
9. COMPONENT AREA AND SOLDING AREA CAN NOT BENDING

REV	DATE	MODEL:UMSH-9388MD-T
0	Feb.20.19'	TITLE: OUTLINE DRAWING
1		DESIGN: H.F. Kuo
2		CHECK: Titan Lo
3		APPROVAL: CKT Chen

URT-BF103-01A